

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

WO 01/51178 A1

- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

[illegible]

WO 01/51178 A1

PROCESS, CATALYST SYSTEM, AND APPARATUS FOR TREATING
SULFUR COMPOUND CONTAINING EFFLUENT

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to removing nitrogen oxides (NO_x) and gaseous sulfur compounds, particularly SO_2 and H_2S , from gaseous streams, in particular the exhaust of lean burn, internal combustion engines by using a regenerable catalyst system.

Related Art

10 Gas desulfurization has been the subject of a variety of technologies. For example, in flue gas desulfurization wet and dry scrubbing techniques have been developed. Dry scrubbing contacts the effluent with a solid material which chemically reacts with the sulfur component and forms a compound. The system can be a fixed bed such as zinc oxide pellets that are used to react with H_2S to form zinc sulfide. The zinc sulfide pellets must be removed and replaced
15 after saturation. The dry scrubber can also be in powder or particulate injected into the stream followed by a baghouse or electrostatic filtration to remove the reacted product. An example of powder would be limestone, which would react after injection into the exhaust stream to form calcium sulfate and/or calcium sulfite hemihydrate sludge. The material is typically delivered as a wet slurry, which dries in the exhaust and reacts with the sulfur oxides. This
20 material is then removed and typically disposed of in a landfill. There are also regenerable dry scrubber materials such as copper oxide on aluminum oxide pellets or spheres. The regenerable copper systems must be heated to and or reduced at high temperatures. This technique requires that the sorption temperature be less than the regeneration temperature.

25 Wet scrubbing techniques use wet slurries or amine solutions and require that the exhaust temperature be reduced to below the boiling point of the solutions to be used. These techniques give rise to losses by evaporation and entrainment and produce products which are contaminated and unusable and must be disposed of/or purified before reuse.

30 Diesel engines produce high levels of nitrogen oxides, carbon monoxide, unburned hydrocarbons from fuel, sulfur oxides and carbonaceous soot. The carbon monoxide and unburned fuel components can be effectively removed by an oxidation catalyst in the oxygen rich diesel exhaust environment. The oxides of nitrogen on the other hand present a special problem since they require a reducing environment to be converted to nitrogen, which is an abundant component of air. Selective catalytic reduction (SCR) in the presence of excess

oxygen with ammonia and hydrocarbons have been studied extensively and used to a limited extent for treating diesel exhaust. The main problems associated with using SCR is that the reductant (ammonia) is hazardous and toxic; it must be stored and transported and that an appreciable amount of reductant is released to the environment (ammonia slip).

5 The SCR process abates NO_x but normally does not abate carbon monoxide, hydrocarbons or sulfur oxides. The reaction of ammonia with sulfur oxides also produces particulate pollution which can foul the air as well as downstream heat transfer equipment.

10 U.S. Pat No. 5,451,558, which is incorporated herein in its entirety, discloses a method of decreasing the level of NO_x , CO and SO_2 emissions from gas turbines using a regenerable catalyst/absorber, preferably made of alumina/platinum/carbonate salt to oxidize the pollutant oxides and absorb them. This system is used commercially under the trademark SCONOX and has been designated LAER (lowest achievable emission rate) by Division IX of the EPA for gas turbines. A regeneration for this type of catalyst/sorber is disclosed in U.S. Pat. No. 5,599,758 at temperatures in the range of 250 to 750°F. Although the system is effective for
15 removing the gaseous sulfur compounds, data demonstrated that the catalyst performance toward NO_x removal is diminished with extended use. This effect results from consumption of sorption sites brought about by the formation of sulfur compounds on the catalyst surface which are not destroyed during the conventional regeneration.

20 U.S. Pat. Application SN 09/113,258 filed July 10, 1998, discloses a system for treating the exhaust of an industrial process or combustion source to capture gaseous sulfur compounds by contacting the exhaust with a structured support for example a monolith coated with a ceramic oxide for example TiO_2 containing a precious metal component for example Pt and a modifier such as Cu.

25 It is an advantage that the present catalyst system may be used to remove gaseous NO_x and sulfur compounds from internal combustion engine exhaust and regenerated and reused. It is an advantage of the present invention that regeneration has been applied to remove the sulfur compounds formed on the catalyst/sorber and return the activity of the catalyst/sorber for NO_x removal. A further advantage of the present invention is a catalyst system that prevents the formation of the sulfur compounds on the NO_x selective catalyst/sorber. It is
30 particular advantage the regeneration does not require a reducing agent other than the motor fuels. These advantages and other advantages and features of the present invention will become apparent from the following description.

SUMMARY OF THE INVENTION

One aspect of the present invention is a process for removing gaseous nitrogen oxides (NO_x) and/or sulfur compounds, particularly SO_2 and/or H_2S from gaseous streams, such as exhaust from internal combustion engines, comprising contacting a gaseous stream containing gaseous sulfur compounds and/or NO_x flowing in a first direction with a catalyst system comprising (1) a material comprising an oxidation catalyst selected from platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations thereof disposed on a high surface area support, an absorber material selected from a hydroxide, carbonate, bicarbonate of an alkali or alkaline earth or mixtures thereof or (2) discrete beds of component (a) a catalyst/sorber comprising a noble metal catalyst component, a metal oxide sorber component, and a modifier consisting of oxides of Ag, Cu, Bi, Sb, Sn, As, In, Pb, Au or mixtures thereof and component (b) a material comprising an oxidation catalyst selected from platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations thereof disposed on a high surface area support, an absorber material selected from a hydroxide, carbonate, bicarbonate of an alkali or alkaline earth or mixtures thereof under conditions to remove said gaseous sulfur compound and NO_x from said stream to said catalyst system and retained therein to cause decrease in the capacity in said system to remove and retain said sulfur and NO_x compounds; and thereafter regenerating the catalyst system comprising contacting said catalyst system with a regenerating gas flowing in a second direction reversed from said first direction under conditions to remove the retained sulfur and/or NO_x compounds, said regenerating gas comprising a reducing gas whereby a portion of the capacity of the catalyst system to remove and retain said sulfur compounds and NO_x is restored. A preferred embodiment comprises alternating said sorbing and regeneration steps.

In the embodiment wherein the catalyst system comprises the two discrete beds of component (a) and component (b) the beds are preferably arranged to have the exhaust gas first contact the (a) component.

The (b) component readily removes both the sulfur and NO_x compounds, however it has been observed to that the sulfur abducted on this component is more difficult to remove than the nitrogen compounds and a higher temperature for the regeneration is required than for nitrogen removal alone. However the sulfur compounds are readily removed from the (a) component at lower temperatures. Thus by having the sulfur compounds first removed on to the (a) component and being prevented from contacting the (b) component, lower regeneration

temperatures can be used while obtaining the benefit of high sulfur removal (component a) and high NO_x removal(component b).

The regenerating gases provide a reducing environment. The reducing agents include hydrogen and hydrocarbons or mixtures thereof. The hydrocarbon preferably comprises of C₁-C₁₂ hydrocarbons, which may be used as one compound or mixtures of compounds. The principal component of the gaseous stream is an inert carrier gas such as nitrogen, helium, argon or steam. The term "principal component" is used to mean over 50%. Of particular significance is that both gasoline and distillate fuels such as diesel may be used as the reducing gas. Thus the fuel being used by an engine may be used for the regeneration, which is important in a non stationary engine such as found in automobiles, trucks and locomotives.

Another aspect of the present invention is the two component catalyst system. In component (a) the noble metal component may comprise Pt, Pd, Rh, Ru or mixtures thereof, preferably Pt. The metal oxide sorber component is an oxide of Ti, Zr, Hf, Ce, Al, Si or mixtures thereof. The modifier comprises an oxide of Ag, Cu, Bi, Sb, Sn, As In, Pb, Au or mixtures thereof, preferably Cu, Ag, Bi and mixtures thereof. The purpose of the modifier is to inhibit the formation of H₂S during regeneration. A variety of modifiers were determined to work; however, the most efficient were found to be copper, bismuth, and silver. The noble metal component is preferably present as from 0.005 to 20.0 wt% of the catalyst/sorber, the sorber component is preferably present as from 70 to 99 wt% of the catalyst/sorber, and the modifier is preferably present as from 1 to 10 wt% of the catalyst/sorber. Preferably the catalyst components can be coated onto a carrier with the catalyst/sorber comprising 1 to 50 wt% of the total weight. In a preferred (a) component Pt comprises 0.005 to 0.05 grams per cc of the noble metal catalyst component and a metal oxide sorber component.

In the (b) component the oxidation catalyst is selected from platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations thereof disposed on a high surface area support. Preferably the catalytic component is intimately and entirely coated with an absorber material selected from a hydroxide, carbonate, bicarbonate or mixture thereof of an alkali or alkaline earth or mixtures thereof. Preferably the oxidation catalyst concentration is 0.05 to 0.6 percent by weight of the component, more preferably 0.1 to 0.4 percent by weight, for example 0.15 to 0.3 percent by weight. In particularly preferred catalysts the platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations comprises 0.005 to 0.05 grams per cc of the total oxidation catalyst and absorber material and

the alkali or alkaline earth comprises 0.000005 to 0.02 grams per cc of the total oxidation catalyst and absorber material. The preferred high surface area support is Al_2O_3 , TiO_2 , ZrO_2 , SiO_2 or mixtures thereof.

The catalyst components can be used in pellet, spheres, particulate, or extruded form.

5

Another aspect of the present invention is an apparatus comprising:

A. an exhaust treatment configuration: at least two catalyst zones each preferably containing a catalyst system comprising discrete beds of (a) a catalyst/sorber comprising a noble metal catalyst component, a metal oxide sorber component, and a modifier consisting of oxides of Ag, Cu, Bi, Sb, Sn, As, In, Pb, Au or mixtures thereof and (b) a material comprising an oxidation catalyst selected from platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations thereof disposed on a high surface area support, an absorber material selected from a hydroxide, carbonate, bicarbonate of an alkali or alkaline earth or mixtures thereof; a main exhaust inlet line connected to an exhaust inlet valve, a separate secondary exhaust inlet line from said exhaust inlet valve connected adjacent to an component (a) of each of said catalyst zones; a separate secondary exhaust outlet line extending from each said catalyst zone adjacent to said component (b) and connecting to an exhaust outlet valve connected to a main exhaust outlet line extending from said exhaust outlet valve, whereby there is a vapor flow path through each said catalyst zone through both discrete beds thereof from inlets to outlets; and

15

20

25

B. a regeneration configuration comprising: a main regeneration gas inlet line connected to a regeneration gas valve, a separate secondary regeneration gas inlet line from said regeneration gas inlet valve connected to each said catalyst zone adjacent to said component (b); a separate secondary regeneration gas outlet extending from each said catalyst zone and connected to each said catalyst zone adjacent to said component (a); each said secondary regeneration gas outlet line being connected to a regeneration gas outlet valve and a main regeneration gas outlet line extending from said regeneration gas outlet valve.

30

Although the sulfur and NO_x compounds are removed from a gaseous stream by the catalyst system according to the present invention, it is not known in what form or by what mechanism the sulfur and nitrogen are associated with the catalyst components, it is believed that the catalyst oxidizes the carbon monoxide and hydrocarbon pollutants to carbon dioxide,

and water. Simultaneously, sulfur dioxide is oxidized to sulfur trioxide and nitrogen monoxide is oxidized to nitrogen dioxide both of which are sorbed by the sorbent component material which is preferably mixed intimately on a microscopic scale with the oxidation catalyst. It is the invention that the sulfur and NO_x compounds in the gaseous stream are in some manner releasably associated with the catalyst/sorber in an oxidizing atmosphere and the invention is not intended to be limited by any proposed mechanism. Preferably the sulfur and/or nitrogen compounds are removed from the catalyst system as a more concentrated stream of sulfur and/or nitrogen compounds than were present in the exhaust gas. Unless otherwise stated percentages and ratios of compounds expressed herein are by weight.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a graph showing NO_x sorption from simulate diesel exhaust using a one component catalyst system.

Figure 2 is a graph showing NO_x sorption from diesel engine exhaust using a two component catalyst system.

Figure 3 is schematic representation of a apparatus using a two component catalyst system for removing NO_x and sulfur compounds.

Figure 4 is a graph showing NO_x sorption using a two component catalyst system in an apparatus as shown in Figure 3.

Figure 5 is a graph showing NO_x sorption using a one component catalyst system and comparing the regeneration conditions.

DETAILED DESCRIPTION

SORPTION

The sorption stage may be carried out at 100 to 1000°F, preferably 300 to 700°F at GHSV 200 to 200,000 hr^{-1} preferably 1,000 to 120,000 hr^{-1} . The pressures may range from subatmospheric to 500 psig.

In carrying out the process, as the sorbent approaches saturation, the concentration of nitrogen oxides and sulfur oxides in the exhaust from the catalyst starts to rise from undetectable to detectable levels. When the detectable levels reach unacceptable levels, the exhaust flow is redirected to a second bed of like composition, which begins the oxidation and sorption process.

DESORPTION/REGENERATION

For the two component catalyst system the desorption stage may be carried out at 100 to 1000°F, however lower temperatures of about 300 to about 800°F are preferred. The single component catalyst system uses temperatures of over 800°F for the regeneration. The pressures may range from subatmospheric to 500 psig. The rate of gas through the catalyst system during regeneration is GHSV 20 to 20,000 hr⁻¹, preferably 50 to 10,000 hr⁻¹

It is proposed that the spent catalyst sorbent is regenerated by chemically reducing the nitrogen dioxide to nitrogen and the sulfur trioxide to sulfur dioxide. This is achieved by exposing the saturated catalyst sorbent composite to a second separate gas stream of lower flow rate containing an inert carrier and/or a reducing gas. The spent regeneration gas contains nitrogen and sulfur dioxide which desorbs and purges out of the system. After regeneration the catalyst system is revitalized and placed back into service and the regeneration gas is redirected to another spent catalyst sorbent.

More importantly we have discovered that the reducing agent can be the fuel (diesel or gasoline) used to power the internal combustion engine. This is significant because a mobile engine would not have to carry a separate regeneration reductant such as ammonia if SCR were to be used.

Furthermore, we have discovered that premature degradation of catalyst/sorbent performance due to sulfur oxide exposure can be minimized or eliminated by using a sulfur rejection system comprised of a front bed of catalyst/sorber (component a of the two component catalyst system) which is specific for sulfur oxides but not active for nitrogen oxides.

By carrying out the present sorption/desorption the sulfur compounds in the feed may be concentrated from 5 to 100 times.

CARRIER

If a carrier is utilized for the catalyst components, the carrier may be characterized as ceramic or metal monolith having a honeycomb structure. Preferably a carrier is used to distribute the catalyst, sorbers and modifiers. The components are deposited onto the carrier in the proportions desired. The composition of the ceramic carrier can be any oxide or combination of oxides. Suitable oxide carriers include the oxides of Al, Zr, Ca, Mg, Hf, Ti, and various mixtures of the oxides, such as cordierite and mullite.

The structure and composition of the carrier is of great importance. The structure of the carrier affects the flow patterns through the catalyst system which in turn affect the

transport to and from the catalyst surface. The ability of the structure to effectively transport the compounds to be catalyzed to the catalyst surface influences the effectiveness of the catalyst/sorber. The carrier is preferably macroporous with 64 to 600 cells (pores) per square inch (cpsi) which is about 25 to 80 pores per linear inch (ppi), although carriers having 5 to 90 ppi are suitable

CONDITIONING

The (a) catalyst component may be conditioned by repeated sorption/desorption cycling. The amount of sulfur components released during this conditioning increases with each regeneration until it equals the amount sorbed. It was found that by pretreating the catalyst/sorber with dilute H_2SO_4 , that the conditioning time was dramatically reduced. For example, instead of 12 hours, conditioning after H_2SO_4 treatment only required several hours at 300°F. The conditioning time was also found to be dependent on the temperature at which the sorption and regenerations were conducted. By increasing the temperature one can increase the amount released, hence, decreasing the conditioning time. A special conditioning may not be necessary, since the catalyst/sorber will become conditioned after several cycles of sorption/regeneration and remain so thereafter.

Turning now to Figure 3, an apparatus using the two-component catalyst system for treating an exhaust gas is shown schematically. Preferably, at least two catalyst sections are employed. There are two catalyst sections, A and B, each containing a two-component catalyst system, 3A/4A and 3B/4B. Each catalyst section A and B is connected alternatively to exhaust gas inlet 1 through valve 2 and lines 11 and 12 respectively adjacent to the 3A and 3B portion. The 3A portion of section A contains the sulfur selective catalyst designated as component (a), similarly the 3B portion of section B contains the sulfur selective catalyst. The 4A and 4B portions contain an NO_x selective catalyst designated as component (b). Lines 13 and 14 extend from catalyst sections A and B respectively and enter valve 6 from which exhaust outlet 7 extends. This describes the NO_x and sulfur removal configuration of the apparatus.

The regeneration configuration comprises a hydrocarbon source 8 which is the reducing agent/carrier and is attached to valve 9 via line 20. Lines 21 and 22 are alternatively connected catalyst sections A and B respectively adjacent to the (b) components. Lines 23 and 24 extend from catalyst to sections A and B respectively through valve 10 to line 25 which goes to a SO_2/H_2S sorbing cartridge 11 and hence to regeneration gas outlet 12.

The operation of the valves is preferably determined from an electronic sensor or sensors 17 in the exhaust outlet 7, which for example, detect NO_x breakthrough which would indicate the need to regenerate the bed in question. Similarly sensor or sensors 16 would, for example, detect O_2 increase to indicate the regeneration of the bed in question is complete. Ideally controller 15 would operate valves 2, 6, 9 and 10 based on the sensed constitution of the stream in question. The regeneration operation should be no longer than the sorption operation, since the exhaust inlet gas should be directed to catalyst sections with capacity to sorb sulfur and NO_x . In situations where this is not the case additional catalyst sections would be required to have a regenerated section always ready to accept the exhaust gas on NO_x breakthrough in the section in current use.

In operation the exhaust gas would enter valve 2 through line 1 and be directed to either line 11 or 12. In this illustration the exhaust gas is directed through line 11 to catalyst section A where it first contacts the sulfur selective catalyst component (a) in bed 3A and then passes through NO_x selective catalyst component (b) in bed 4A and exits via line 13 to valve 6 and hence to outlet line 7.

During all or part of this time a regeneration gas containing a reducing agent (as a gas) from tank 8 passes through line 20 into valve 9 which directs it through line 22 into catalyst section B where it desorbs sulfur compounds and nitrogen compounds sorbed in a prior sorption cycle. The desorbing gas enters in reverse flow direction to the exhaust gas and contacts the NO_x selective catalyst component (b) 4B first then the sulfur selective catalyst component (a) 3B.

The sulfur in the regeneration gas is concentrated compared to the exhaust gas. The regeneration gas exits section B through line 24 into valve 10, line 16 and sulfur sorbing cartridge 11 and out through line 12.

At a given time or when the NO_x breaks through in catalyst section A, valve 2 is reversed to send the exhaust gas to catalyst section B and valve 6 is reversed to exit exhaust from section B, while the regeneration gas to section B is terminated. Desirably the regenerating gas is now directed through valve 9 and line 21 to section A at 4A and the desorbed gas directed from section A through valve 10 and line 25 to cartridge 1 and exit 12 with the described cycle continuously repeating.

EXAMPLES

Component (a) catalyst/sorbers used in the examples were prepared on 200-cell-per-square-inch cordierite square-cell honeycomb. The TiO_2/Pt washcoat was prepared by incipient wetness. Pt content ranged from 0.1 to 2.2%. After drying and calcining at 500°C , the solids were then dispersed in 7% acetic acid and ball milled overnight. The ceramic honeycombs were then dipped into the slurry of washcoat/Pt, removed, blown off, and then dried at 150°C .

The samples were then immersed into a modifier solution, removed, blown off, and finally dried at 150°C . The catalyst/sorbers had a nominal composition as shown in Table 1.

Table 1: Catalyst/sorber Composition (except as otherwise noted):

| | |
|----------------|-----------------------------|
| TiO_2 | 0.4 - 3.5 g/in ³ |
| Pt | 0 - .08 g/in ³ |
| X | 0 - 0.3 g/in ³ |

For testing, the samples were placed into a 304 stainless steel tubular reactor and placed inside a three-zone furnace. The reactor was connected to a gas delivery system which delivered mixed gases simulating a gas turbine exhaust. The gases were measured and controlled by Matheson mass flow transducers. Water was injected into a preheat furnace using a Cole Palmer instrument number 74900.

Example 1 (COMPARISON)

A catalyst sorbent (the single catalyst or the b component) as taught in U.S. Patent No. 5,451,558 was prepared by coating a 200 cell/square inch cordierite honeycomb with 0.098 gram high surface area Al_2O_3 per cc, 1.62 milligram/cc Pt and 7.93 milligram/cc K_2CO_3 . The catalyst core sample was placed in a laboratory reactor for testing. A simulated diesel exhaust was used with a space velocity of 30,000/hr, 300 ppm NO_x , 900 ppm CO, 8.0% oxygen, 7.6% CO_2 , 10.0% H_2O , and a temperature of about 500°F . The simulated exhaust stream did not contain sulfur compounds during this example.

The catalyst sorbent was exposed for multiple cycles of two minute oxidation/sorption followed by two minute reductive regeneration. The regeneration gas used consisted of 9% methane in nitrogen at 500°F . The results of this experiment, shown in the accompanying Figure 1, illustrate that the outlet NO_x drops from 300 to less than 2 ppm at the beginning of a sorption cycle. The outlet NO_x then increases during the 2 minute cycle until reaching a final

value of about 30 ppm. Initial inlet NO_x values before each sorption cycle are also provided. The average NO_x destruction efficiency obtained during this study was 95%.

Example 2

A catalyst system was prepared by placing two catalyst/sorbers in series. The front segment (component a) was prepared by coating a 200 cell per square inch cordierite honeycomb structure with 0.122 grams/cc TiO₂ and 1.84 milligram/cc Pt and 10.0 milligrams/cc Cu(O) as described above and in U.S. Pat. Application 09/113,258 which is incorporated herein in its entirety. Component (b) was prepared as in Example 1.

A fraction of the diesel exhaust produced by a 4-cylinder turbo-assisted engine with a displacement of 3.9 liters using #2 diesel fuel was filtered and passed through a laboratory reactor and the two catalyst/sorbers in series (component a first followed by component b). Various loads were applied to the engine via an electrical generator while maintaining a constant engine speed of 1900 rpm.

The diesel engine exhaust composition is shown in Table 1 for the associated engine loads.

Table 2

Diesel engine exhaust composition under various loads

| Engine Load | 0% | 48% | 80% |
|-----------------------|------|------|------|
| NO _x (ppm) | 250 | 905 | 1972 |
| SO ₂ (ppm) | 2 | 18 | 25 |
| CO (ppm) | 375 | 95 | 54 |
| CO ₂ (%) | 2.1 | 3.6 | 4.4 |
| O ₂ (%) | 17.9 | 12.9 | 10.0 |

Tests were carried out at a space velocity of 12,000 hr⁻¹. The catalyst was regenerated with 2% H₂ gas in a nitrogen carrier at a space velocity of 2,000 hr⁻¹. The generation flow direction was opposite the exhaust gas flow.

The average catalyst temperature was 700°F during this run. Outlet NO_x concentrations are shown in Figure 2 as a function of time for the engine loads shown in Table 2. The length of time the catalyst system will effectively remove NO_x decreases with increasing inlet concentration of NO_x. Table 3 shows the amount of time the catalysts remove greater than 90% of the NO_x for each load and inlet NO_x concentration. The SO₂ in the diesel

exhaust was captured by component (a) of the two bed system during the oxidation mode and released as SO_2 in the regeneration flow stream.

Table 3

Time for greater than 90% NO_x removal for various NO_x inlet concentrations.

| | | | | |
|---|---------------------------|------------|-----------|-----------|
| 5 | Engine Load | 0% | 48% | 80% |
| | Inlet NO_x (ppm) | 250 | 905 | 1972 |
| | Time for >90% Removal | 20 minutes | 4 minutes | 2 minutes |

Example 3

10 The two bed system described in example 2 was tested in a laboratory reactor with a simulated exhaust with composition of 70 ppm NO_x , 10 ppm CO, 3.05% CO_2 , 10% H_2O and 14.5% O_2 in nitrogen. The oxidation sorption cycle was carried out at 600°F, a space velocity of 30,000 hr^{-1} for 15 minutes.

15 During oxidation/sorption the catalyst system removed the NO_x to undetectable levels, then as catalyst sorption sites were filled, the concentration of NO_x emitted rose to a final level of 12 ppm. The efficiency of NO_x removal was 96.5%. At the end of the oxidation sorption cycle, regeneration was achieved with vapor-phase #2 diesel. Regeneration with diesel vapors was accomplished by injecting the liquid diesel into the hot nitrogen stream. The regeneration gas was then directed to the spent catalyst/sorber in a low direction opposite the simulated gas. The flow rate of diesel required for regeneration was 0.005 cc/min of liquid diesel; 20 regeneration occurred at a space velocity of 3,500 hr^{-1} for 3 minutes. Three minutes was found to be sufficient for complete regeneration. Thus, 0.41 g of diesel fuel per gram of NO_x (as NO_2) was required to convert the NO_x to N_2 . Subsequent oxidation/sorption cycles showed a fully revitalized catalyst.

Example 4

25 A two-chamber assembly was constructed as depicted in Figure 3. The catalyst system composition and configuration used was the same as that in examples 2 and 3. The diesel exhaust was produced by a 4-cylinder turbo-assisted engine with a displacement of 3.9 liters; the fuel was #2 diesel. A 48% load was applied to the engine via an electrical generator while maintaining a constant speed of 1900 rpm. All of the engine exhaust was passed over the catalyst at a space velocity of 11,800 hr^{-1} . No particulate filter was used to remove particulate 30 matter from the exhaust prior to the catalyst.

The average exhaust inlet temperature to the catalyst was 525°F. The catalyst was cycled between the engine exhaust stream for 5 minutes and a regeneration gas for 5 minutes. The regeneration gas consisted of 14% H₂ in nitrogen at a space velocity of 220 hr⁻¹. The catalyst removed 98.9% of the inlet NO_x over a 50-minute test period. This is illustrated in Figure 4.

Example 5

Examples 2, 3 and 4 used a two-bed catalyst/sorbent system. This configuration was desirable to prevent excessive sulfur oxide exposure to the second bed. It had been shown that the Pt/Al₂O₃/K₂CO₃ system described in Example 1 was more difficult to regenerate if exposed to excessive sulfur oxide. A catalyst prepared by coating a 200 cell per square inch cordierite honeycomb structure coated with 0.122 grams/cc TiO₂, 1.84 milligram/cc Pt and 7.93 milligrams/cc Na₂CO₃ was more easily regenerated with exposed to sulfur oxides.

In this example a single bed of the TiO₂/Pt/Na₂CO₃ catalyst/sorber was placed in a laboratory reactor and exposed to an oxidizing sorption cycle with simulated exhaust mixture containing 70 ppm NO_x, 50 ppm CO, 3.05% CO₂, 10% H₂) and 14.5% O₂ in nitrogen. The run was carried out at 600°F and with a space velocity of 22,500 hr⁻¹.

The results demonstrated that all of the carbon monoxide was oxidized to carbon dioxide upon contact with the catalyst. The outlet NO_x levels are shown in Figure 5 as a function of the exposure time. After approximately 9 minutes of catalyst exposure to the simulated exhaust stream the NO_x outlet concentration (curve a) begins to increase, achieving a value of approximately 3.8 ppm after a 14 minute exposure. After each oxidation sorption cycle regeneration is carried out using 2% methane in nitrogen at 600°F.

Also shown in Figure 5 are NO_x emissions obtained after two more cycles of simulated exhaust stream, but with 30 ppm of sulfur dioxide added to the simulated exhaust stream (curve b). The data demonstrates that the catalyst performance toward NO_x removal is diminished with extended use. This effect results from consumption of sorption sites brought about by the formation of Na₂SO₄ on the catalyst surface which are not destroyed during regeneration at 600°F.

The catalyst sample was then exposed to the same regeneration stream as previous, however, during this regeneration cycle the temperature was raised to 830°F. Data obtained during this regeneration showed the removal of sulfur from the catalyst surface with the release of both SO₂ and H₂S.

After the high-temperature exposure to the regeneration gas, the reactor was cooled to 600°F and another test run was accomplished using the simulated exhaust stream. The data from this test are also shown in Figure 5 (curve c). The catalyst now performs as it did during the initial test before exposure to the sulfur dioxide containing streams.

5 Generally herein the gas being treated is referred to as "exhaust gas", which is a preferred use for the present catalyst system, processes and apparatus, however, gas from any source may be used and the term "exhaust gas" is used herein to include all sources.

The invention claimed is:

1. A process for removing gaseous sulfur compounds and/or NO_x , comprising contacting a gaseous stream containing gaseous sulfur compounds and/or NO_x with a catalyst system comprising (1) a material comprising an oxidation catalyst selected from platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations thereof disposed on a high surface area support, an absorber material selected from a hydroxide, carbonate, bicarbonate of an alkali or alkaline earth or mixtures thereof or (2) discrete beds of (a) a catalyst/sorber comprising a noble metal catalyst component, a metal oxide sorber component, and a modifier consisting of oxides of Ag, Cu, Bi, Sb, Sn, As, In, Pb, Au or mixtures thereof and (b) a material comprising an oxidation catalyst selected from platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations thereof disposed on a high surface area support, an absorber material selected from a hydroxide, carbonate, bicarbonate of an alkali or alkaline earth or mixtures thereof under conditions to remove said gaseous sulfur compound and/or NO_x from said stream to said catalyst system and retained therein to cause a decrease in the capacity in said system to remove and retain said sulfur and/or NO_x compounds; and thereafter regenerating the catalyst system comprising contacting said catalyst system with a regenerating gas under conditions to remove the retained sulfur and/or NO_x compounds, said regenerating gas comprising a reducing gas whereby a portion of the capacity of the catalyst system to remove and retain said sulfur compounds and NO_x is restored.

2. The process according to claim 1 wherein said catalyst system is a material comprising an oxidation catalyst selected from platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations thereof disposed on a high surface area support, an absorber material selected from a hydroxide, carbonate, bicarbonate of an alkali or alkaline earth or mixtures thereof and said regenerating is carried out a temperature above 800°F .

3. The process according to claim 2 wherein said oxidation catalyst comprises Pt and said absorber material comprises Na_2CO_3 .

4. The process according to claim 2 wherein said platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations comprises 0.005 to 0.05 grams per cc of the total oxidation catalyst and absorber material.

5. The process according to claim 2 wherein said high surface area support is Al_2O_3 , TiO_2 , ZrO_2 , SiO_2 or mixtures thereof.

6. The process according to claim 2 wherein the alkali or alkaline earth comprises 0.000005 to 0.02 grams per cc of the total oxidation catalyst and absorber material.

7. The process according to claim 1 wherein the regenerating gas comprises steam and a reducing gas of hydrogen, hydrocarbons or mixtures thereof.

8. The process according to claim 1 wherein said catalyst system is discrete beds of (a) a catalyst/sorber comprising a noble metal catalyst component, a metal oxide sorber component, and a modifier consisting of oxides of Ag, Cu, Bi, Sb, Sn, As, In, Pb, Au or mixtures thereof and (b) a material comprising an oxidation catalyst selected from platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations thereof disposed on a high surface area support, an absorber material selected from a hydroxide, carbonate, bicarbonate of an alkali or alkaline earth or mixtures thereof.

9. The process according to claim 7 wherein said gaseous stream containing gaseous sulfur compounds and/or NO_x flows in a first direction and said regenerating gas flows in a second direction reverse to said first direction.

10. The process according to claim 9 wherein gasoline is present in said regenerating gas.

11. The process according to claim 9 wherein diesel is present in said regenerating gas.

12. The process according to claim 8 wherein the (a) catalyst/sorber comprises Pt and is supported on a ceramic oxide.

13. The process according to claim 12 wherein Pt comprises 0.005 to 0.05 grams per cc of the noble metal catalyst component and a metal oxide sorber component.

14. The process according to claim 8 wherein said noble metal catalyst component of (a) comprises Pt, Pd, Rh, Ru or mixtures thereof.

15. The process according to claim 8 wherein the metal oxide sorber component of (a) is an oxide of Ti, Zr, Hf, Ce or mixtures thereof.

16. The process according to claim 14 wherein the metal oxide sorber component of (a) is an oxide of Ti, Zr, Hf, Ce or mixtures thereof.

17. The process according to claim 8 wherein the modifier of (a) is Cu, Ag, Bi or mixtures thereof.

18. The process according to claim 16 wherein the modifier of (a) is an oxide Cu, Ag, Bi or mixtures thereof.

19. The process according to claim 18 wherein the modifier of (a) is Cu oxide.

20. The process according to claim 18 wherein the modifier of (a) is Ag oxide.
21. The process according to claim 18 wherein the modifier of (a) is Bi oxide.
22. The process according to claim 1 where the regeneration gas comprises an inert carrier and a reducing component.
23. The process according to claim 22 where the inert gas is nitrogen, helium, argon, or steam.
24. The process according to claim 23 wherein the reducing component is hydrogen, methane, hydrocarbons from C₁ to C₁₂ or mixtures thereof.
25. The process according to claim 1 wherein the regeneration gas comprises oxygen.
26. A catalyst system comprising discrete beds of (a) a catalyst/sorber comprising a noble metal catalyst component, a metal oxide sorber component, and a modifier consisting of oxides of Ag, Cu, Bi, Sb, Sn, As, In, Pb, Au or mixtures thereof and (b) a material comprising an oxidation catalyst selected from platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations thereof disposed on a high surface area support, an absorber material selected from a hydroxide, carbonate, bicarbonate of an alkali or alkaline earth or mixtures thereof.
27. The catalyst system according to claim 26 wherein said noble metal catalyst component of (a) comprises Pt, Pd, Rh, Ru or mixtures thereof.
28. The catalyst system according to claim 27 wherein the metal oxide sorber component of (a) is an oxide of Ti, Zr, Hf, Ce or mixtures thereof.
29. The catalyst system according to claim 28 wherein the modifier of (a) is Cu, Ag, Bi or mixtures thereof.
30. The catalyst system according to claim 29 wherein the modifier of (a) is Cu oxide.
31. The catalyst system according to claim 29 wherein the modifier of (a) is Ag oxide.
32. The catalyst system according to claim 29 wherein the modifier of (a) is Bi oxide.
33. The catalyst system according to claim 27 wherein said platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations of (b) comprises 0.005 to 0.05 grams per cc of the total oxidation catalyst and absorber material.
34. The process according to claim 33 wherein said high surface area support of (b) is Al₂O₃, TiO₂, ZrO₂, SiO₂ or mixtures thereof.
35. The catalyst system according to claim 34 the alkali or alkaline earth of (b) comprises 0.000005 to 0.02 grams per cc of the total oxidation catalyst and absorber material.

36. The catalyst system according to claim 35 wherein the metal oxide sorber component of (a) is an oxide of Ti, Zr, Hf, Ce or mixtures thereof.

37. The catalyst system according to claim 36 wherein the modifier of (a) is Cu oxide.

38. An apparatus comprising:

A. an exhaust treatment configuration:

- (1) at least two catalysts zones, each said catalyst zone containing a catalyst system comprising discrete beds of (a) a catalyst/sorber comprising a noble metal catalyst component, a metal oxide sorber component, and a modifier consisting of oxides of Ag, Cu, Bi, Sb, Sn, As, In, Pb, Au or mixtures thereof and (b) a material comprising an oxidation catalyst selected from platinum, palladium, rhodium, cobalt, nickel, iron, copper, molybdenum or combinations thereof disposed on a high surface area support, an absorber material selected from a hydroxide, carbonate, bicarbonate of an alkali or alkaline earth or mixtures thereof,
 - (2) a main exhaust inlet line connected to
 - (3) an exhaust inlet valve,
 - (4) a separate secondary exhaust inlet line from said exhaust inlet valve connected adjacent to the (a) bed of each of said catalyst zones,
 - (5) a separate secondary exhaust outlet line extending from each said catalyst zone adjacent to the (b) bed thereof and connecting to
 - (6) an exhaust outlet valve connected to a main exhaust outlet line extending from said exhaust outlet valve, whereby there is a vapor flow path through each said catalyst zone through both discrete beds thereof from inlets to outlets in a configuration,;
- and

B. a regeneration configuration comprising:

- (1) a main regeneration gas inlet line connected to
- (2) a regeneration gas valve,

- (3) a separate secondary regeneration gas inlet line from said regeneration gas inlet valve connected to each said catalyst zones adjacent to said (b) beds thereof,
- (4) a separate secondary regeneration gas outlet extending from each said catalyst zone adjacent to the (a) bed thereof and connected to,
- (5) a regeneration gas outlet valve and
- (6) a main regeneration gas outlet line extending from said regeneration gas outlet valve.

39. The method of treating a gaseous stream containing gaseous sulfur compounds and/or NO_x compounds in an apparatus according to claim 38 comprising the steps of:

A. a treatment cycle comprising:

- (1) feeding a gas containing gaseous sulfur compound and/or NO_x compounds to said main exhaust inlet line to said exhaust inlet valve,
- (2) adjusting said exhaust inlet valve to a first catalyst zone for contact with said catalyst system,
- (3) passing said gas containing gaseous sulfur compound and/or NO_x compounds through said secondary exhaust inlet line to said first catalyst zone to contact said (a) bed first, and withdrawing said exhaust stream from said first catalyst zone through said secondary exhaust outlet line to said exhaust valve,
- (4) said exhaust outlet valve being adjusted to connect with said main exhaust outlet line,
- (5) adjusting said exhaust inlet valve and said exhaust outlet valve from said first catalyst zone to a different catalyst zone thereby terminating said feeding of gas containing gaseous sulfur compound and/or NO_x compounds; and

B. a regenerating gas cycle after said treatment cycle comprising:


- (1) feeding a regenerating gas through said main regenerating gas line to said regenerating gas valve,

- (2) adjusting said regenerating gas valve to contact with said first catalyst zone and passing said regenerating gas through said secondary regenerating gas line to said first catalyst zone to contact said (b) bed first,
- (3) withdrawing said regenerating gas from said first catalyst zone through said secondary regenerating gas line to
- (4) said regenerating gas valve which is adjusted to connect to said main regenerating gas line.

40. The process according to claim 39 wherein the treatment cycle and regeneration cycle are repeated.


1/5

FIG. 1

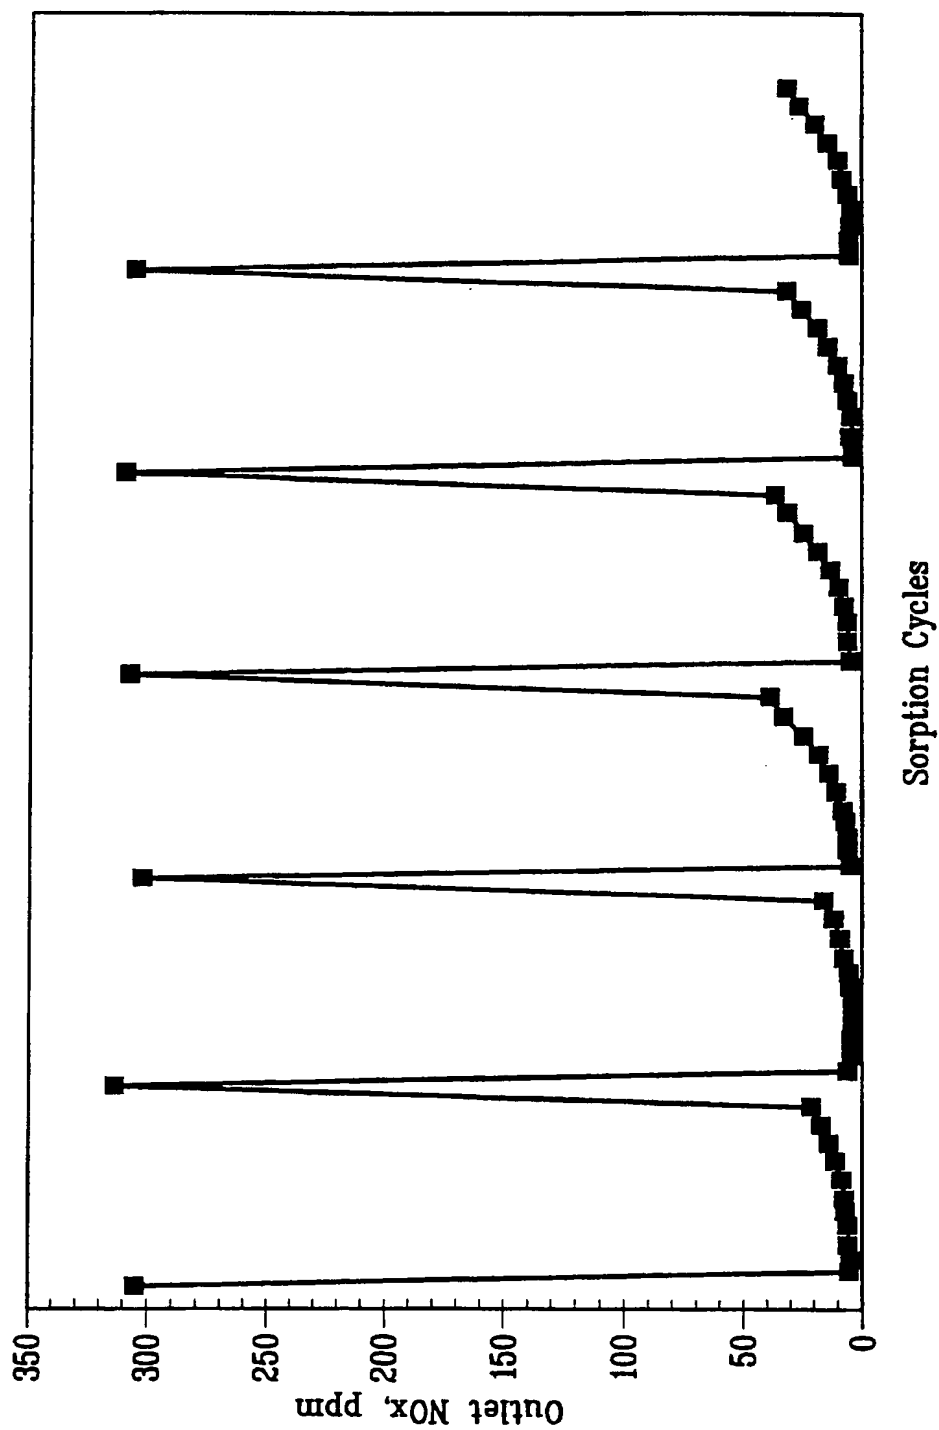

SUBSTITUTE SHEET (RULE 26)

2/5

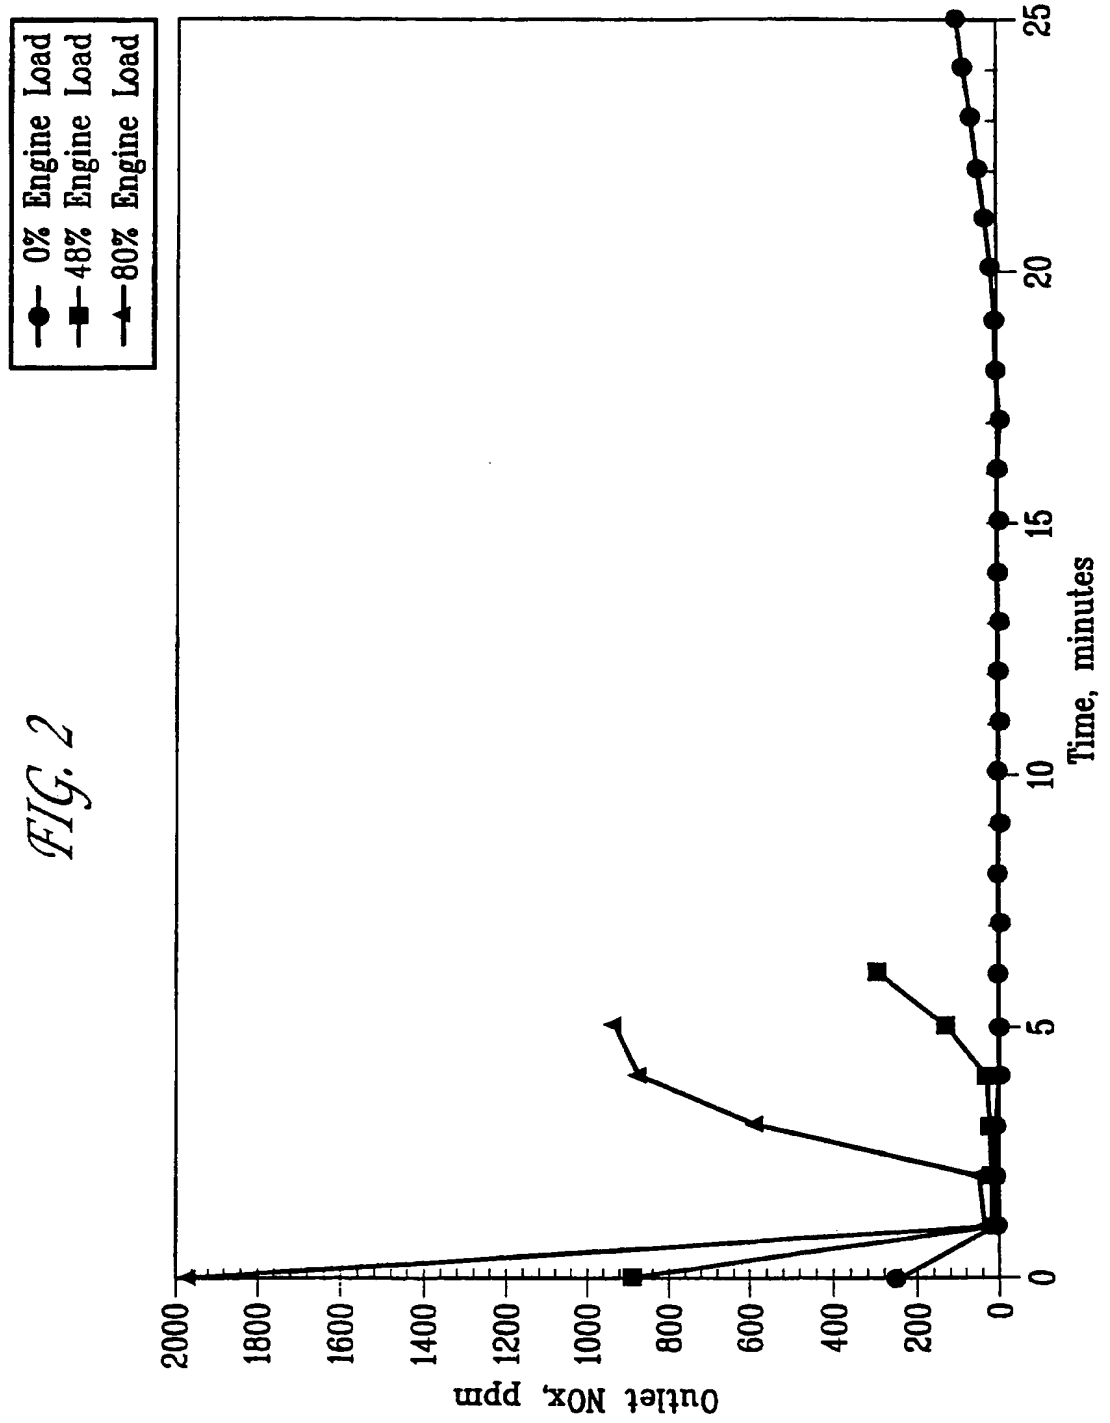

SUBSTITUTE SHEET (RULE 26)


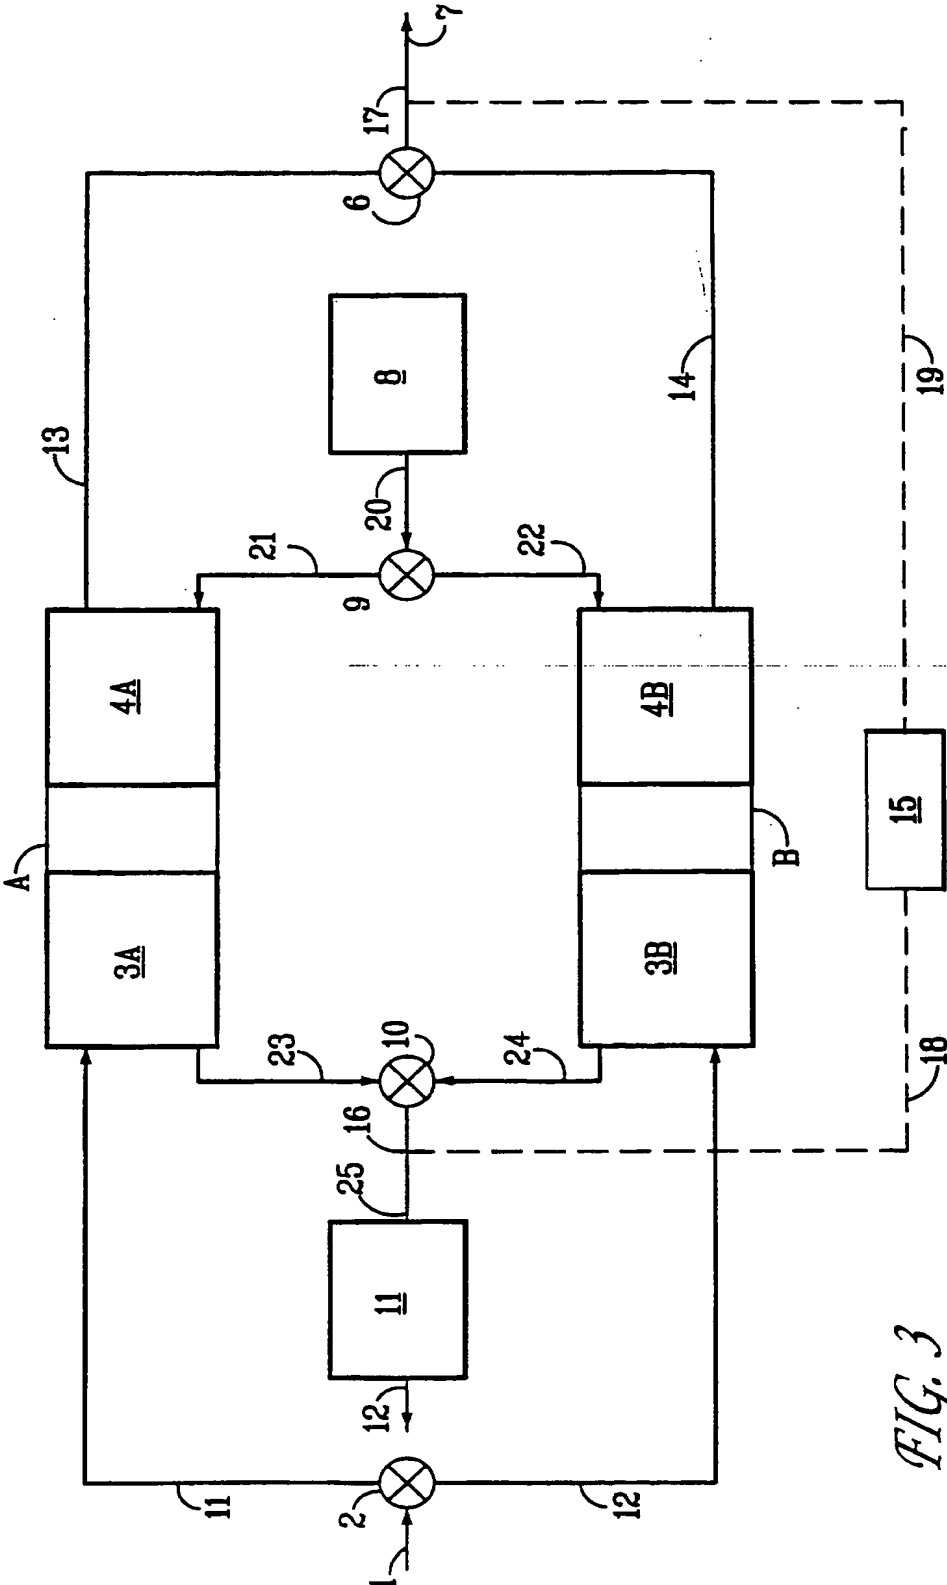


FIG. 3


4/5

FIG. 4

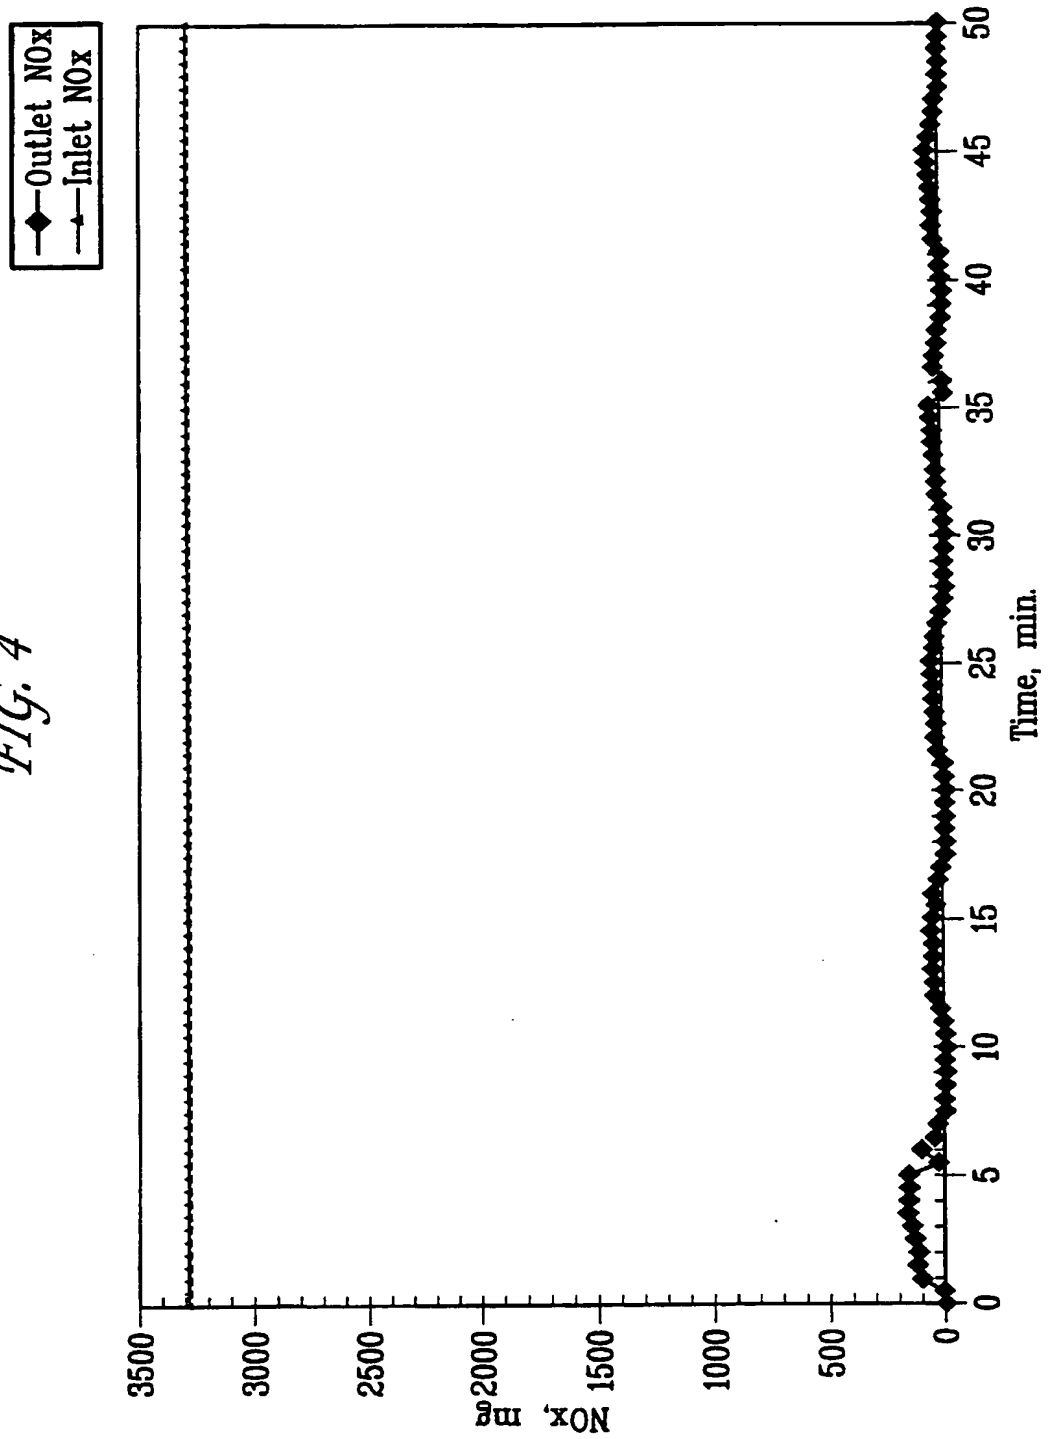

SUBSTITUTE SHEET (RULE 26)

5/5

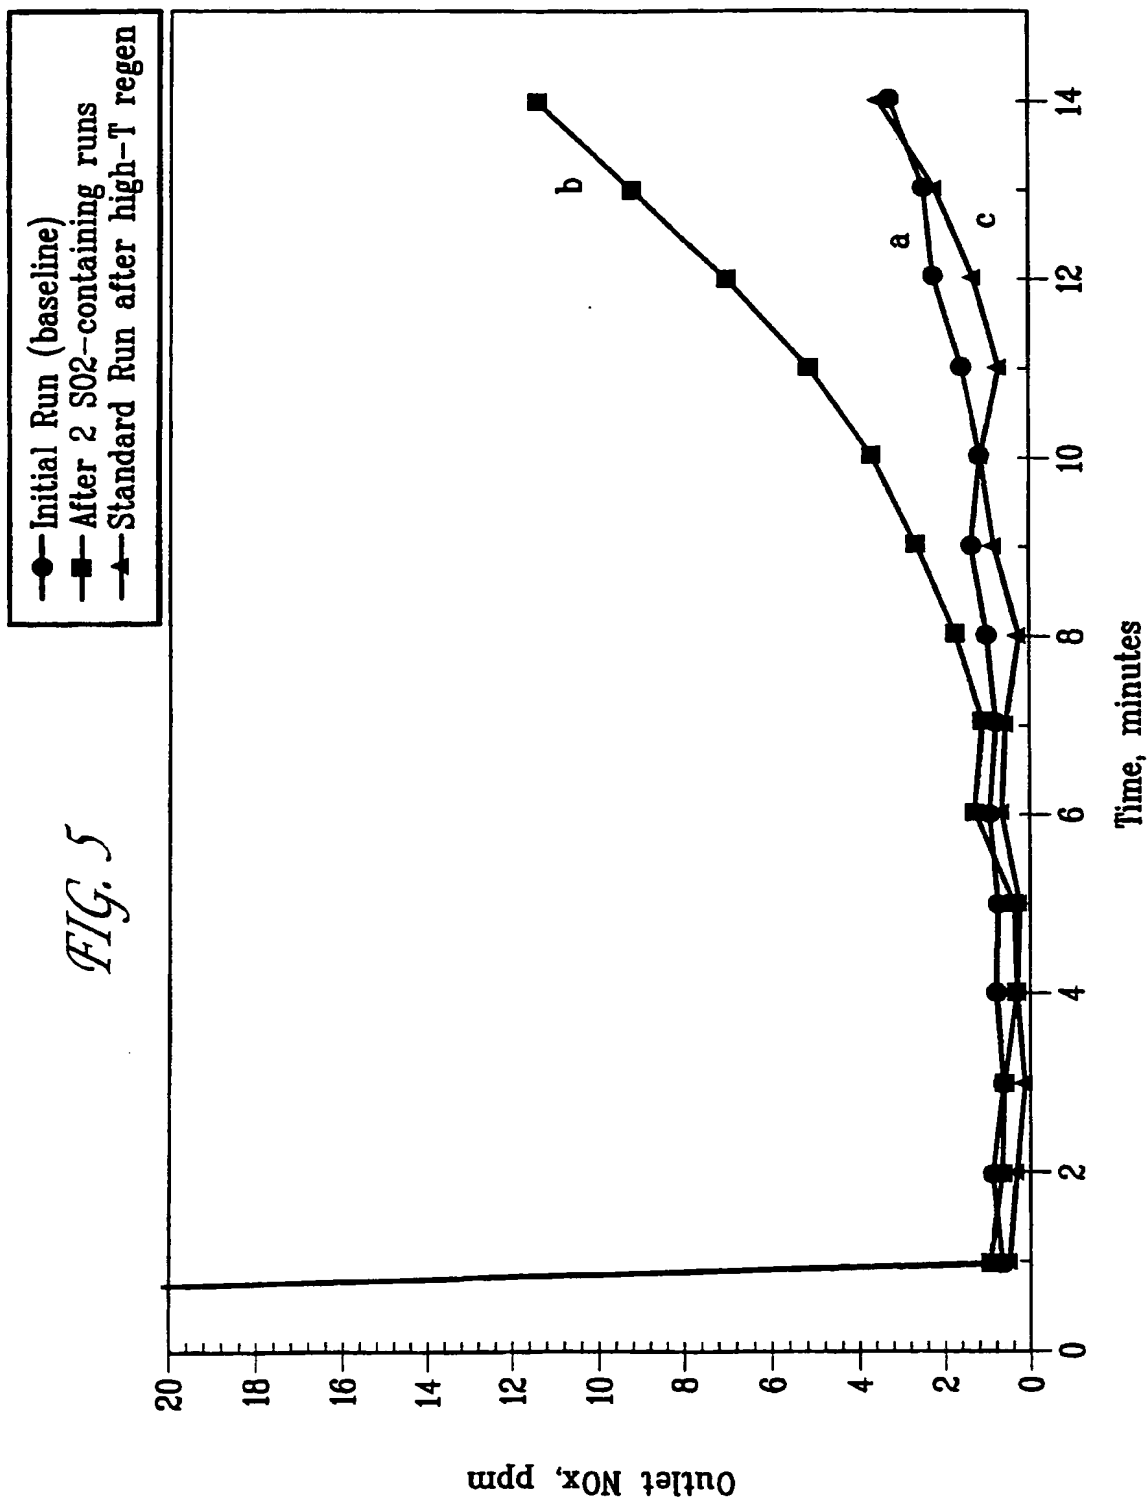

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/00617**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(7) : B01D 47/00, 50/00, 53/02, 53/34; B01J 8/00; C01B 21/20

US CL : Please See Extra Sheet.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 422/168, 169, 171, 172, 180; 423/ 210, 212, 213.2, 213.5, 213.7

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EAST

search terms: exhaust, sulfur, oxidation, catalyst, sorber

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| Y | US 5,762,885 A (DEBBAGE et al) 09 June 1998, fig. 1 and col. 2, lines 3-63. | 1-40 |
| Y | US 5,953,911 A (GUTH et al) 21 September 1999, col. 4, line 29-col. 5, line 3. | 1-40 |
| Y | US 5,665,321 A (CAMPBELL et al) 09 September 1997, fig. 6 and col. 6, lines 33-42. | 1-40 |
| Y, E | US 6,037,307 A (CAMPBELL et al) 14 March 2000, col. 2, lines 30-48. | 1-40 |

☐ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

| | |
|---|--|
| * Special categories of cited documents: | *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention |
| *A* document defining the general state of the art which is not considered to be of particular relevance | *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone |
| *B* earlier document published on or after the international filing date | *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | *A* document member of the same patent family |
| *O* document referring to an oral disclosure, use, exhibition or other means | |
| *P* document published prior to the international filing date but later than the priority date claimed | |

Date of the actual completion of the international search

25 APRIL 2000

Date of mailing of the international search report

16 MAY 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

ALEXA DOROSHENK

Telephone No. (703) 308-0651

Form PCT/ISA/210 (second sheet) (July 1998)*

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/00617

A. CLASSIFICATION OF SUBJECT MATTER:

US CL :

422/168, 169, 171, 172, 180; 423/ 210, 212, 213.2, 213.5, 213.7

EUROPEAN PATENT OFFICE

Patent Abstracts of Japan

PUBLICATION NUMBER : 62106826
PUBLICATION DATE : 18-05-87


APPLICATION DATE : 06-11-85
APPLICATION NUMBER : 60247156

APPLICANT : NIPPON SHOKUBAI KAGAKU KOGYO
CO LTD;

INVENTOR : MITSUI KIICHIRO;

INT.CL. : B01D 53/36 B01J 38/10 F01N 3/20

TITLE : METHOD FOR REMOVING NITROGEN
OXIDE IN DIESEL EXHAUST GAS

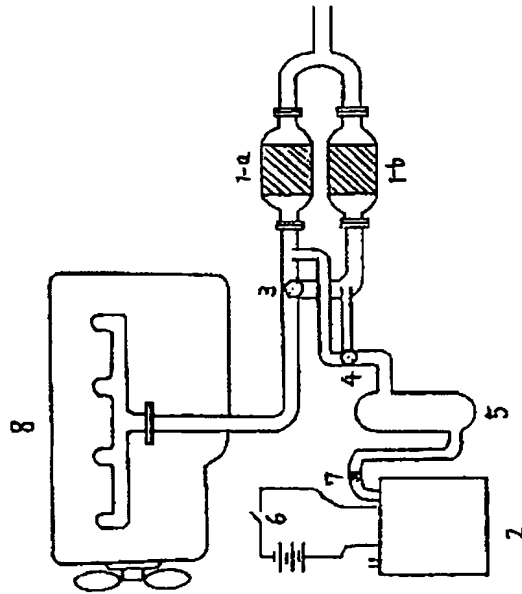

ABSTRACT : PURPOSE: To perform efficient denitration, by contacting NO_x-containing gas with a catalyst in the presence of O₂ to oxidize and absorb NO_x by the catalyst and stopping the exhaust gas when absorbing efficiency is lowered to allow a reducing agent to flow and performing the reductive removal of accumulated NO_x.

CONSTITUTION: The exhaust gas from an engine is introduced into one of catalysts 1-a, 1-b and NO_x is oxidized and absorbed by the catalyst in the presence of O₂ while a gaseous reducing agent such as H₂ is generated by a H₂- generator 2 to be introduced into the catalyst, through which no exhaust gas flows, through a sump 5. NO_x oxidized and absorbed by the catalyst is reduced and removed by the reducing agent and the catalyst is regenerated. The catalyst 1-a, 1-b are periodically changed over at the point of time when absorbing efficiency was lowered. By this method, because the reducing agent is used only in an amount necessary for reducing NO_x absorbed by the catalyst, a small quantity of the reducing agent is sufficient.

COPYRIGHT: (C)1987,JPO&Japio